


OTHER SPECIFICATIONS STANDARD DRILLED & COMB-BOUND

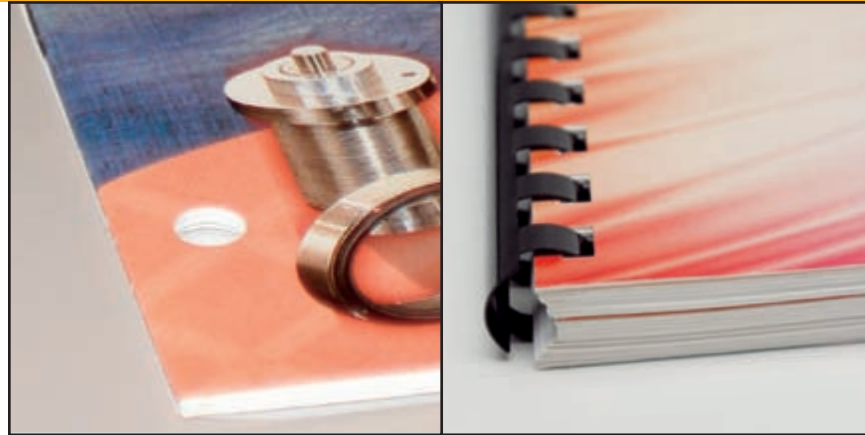


DrilledComb-Bound

Drilled and Comb-Bound bindings have few limitations. They use the entire final trim size for the image area. Lettering and graphics placed within 0.5" of a Drilled edge and 0.25" of a Comb-Bound edge may be lost when holes are punched. Corporate Graphics has a variety of drill hole sizes, with 0.375" being our standard. Contact your sales representative for the complete list of drill hole sizes.

OTHER SPECIFICATIONS STANDARD DRILLED & COMB-BOUND

Standard Drilling

Punching three holes in a finished printed piece for use in a ring binder.

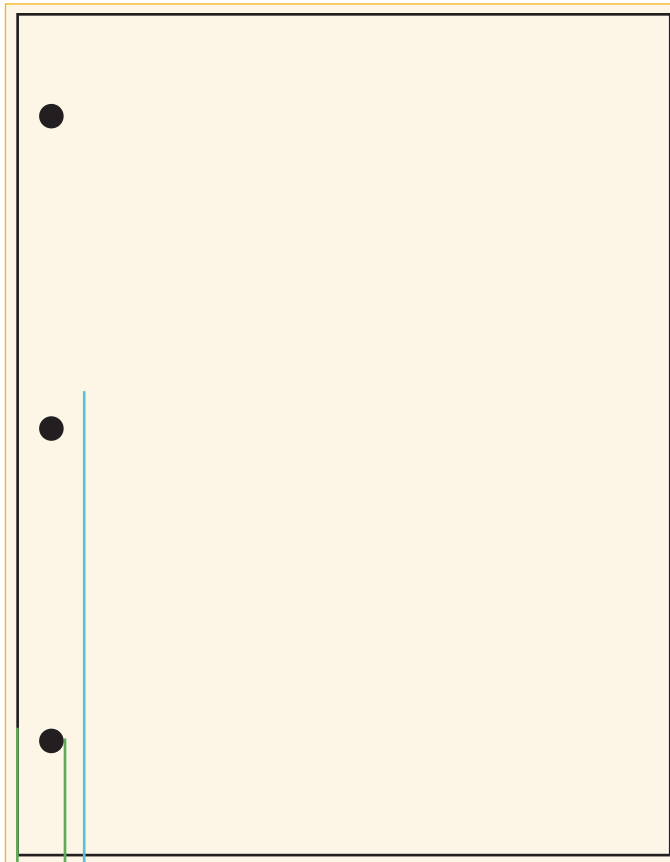


Start of Visual Image area 0.625".

Allow 0.5" from edge of page for drill hole.

Bleed (0.125") on all 4 sides for single pages. Follow specifications for other types of binding.

Comb Binding

Binding pages together with a plastic comb inserted into punched holes.



Start of Visual Image area 0.375".

Allow 0.25" from edge of page for punches.